

SJ6826/32 RT ROUGH TERRAIN SCISSOR LIFTS

**ACCESS
SOLUTIONS**

Experience | Safety | Innovation



STANDARD FEATURES

- Drivable at full height
- Relay based control system
- Overload sensing system
- Standard Skyjack colour coded and numbered wiring
- Shroud style, impact resistant composite control box with extended cable
- Proportional controls for drive and lift functions
- Tilt alarm (4.5° x 2.5°) with drive and lift cut-out
- Lift up side doors for easy access
- Kubota diesel engine
- ECOSTART anti-engine idle
- 90° Swing out engine tray
- Crossover symmetrical 4WD
- Non-marking grip lug foam-filled tires
- Up to 50% Gradeability (SJ6826 RT)
- Multiple spring applied hydraulic released brakes
- All motion audible alarm
- Lowering warning system
- 1.52m Roll out extension deck
- Fold down hinged railings
- Full height spring hinged entry gate
- Lanyard attachment points
- Wiring for AC outlet at platform
- Forklift pockets and tie down/lift lugs
- Emergency lowering system
- Independent/automatic levelling outriggers
- Flashing light
- Operator horn
- Telematics ready

OPTIONS

- Heavy duty pipe rack
- Tool caddy
- Diesel scrubber
- Bio oil
- Secondary Guarding Lift Enable (SGLE)
- ELEVATE telematics

† Standard lead times may be increased when optional equipment is added, consult factory.
‡ Capacities and machine weights may differ when options are added.

AS/NZ 01/2021

ACCESS SOLUTIONS

0800 656 343 www.accesssolutions.co.nz

AUCKLAND
100 Leonard Road
Mt Wellington
Auckland

WELLINGTON
33 Broken Hill Road
Porirua
Wellington



CHRISTCHURCH
28 Nga Mahi Road
Sockburn
Christchurch

SJ6826/32 RT ROUGH TERRAIN SCISSOR LIFTS



Experience | Safety | Innovation

Dimensions	SJ6826 RT	SJ6832 RT
A Work Height	9.92 m	11.75 m
B Raised Platform Height	7.92 m	9.75 m
C Lowered Platform Height	1.23 m	1.37 m
D Overall Width	1.76 m	1.76 m
E Overall Length	3.35 m	3.35 m
F Stowed Height (Rails Up)	2.37 m	2.51 m
G Stowed Height (Rails Down)	1.61 m	1.75 m
H Platform Width (Inside Dimension)	1.42 m	1.42 m
I Platform Length (Inside Dimension)	2.44 m	2.44 m
J Platform Length (Deck Extended)	4.11 m	4.11 m
Specifications	SJ6826 RT	SJ6832 RT
Extension Deck	1.52 m	1.52 m
Ground Clearance	0.20 m	0.20 m
Wheelbase	2.04 m	2.04 m
Weight	3,440 kg	3,575 kg
Gradeability	50%	40%
Turning Radius (Inside)	1.52 m	1.52 m
Turning Radius (Outside)	3.96 m	3.96 m
Lift Time (With Rated Load)	36 sec	39 sec
Lower time (With Rated Load)	36 sec	36 sec
Drive Speed (Stowed)	6.1 km/h	6.1 km/h
Drive Speed (Raised)	0.6 km/h	0.6 km/h
Maximum Drive Height	Full Height	Full Height
Capacity (Overall)	567 kg	454 kg
Distributed Capacity (Main Platform)	431 kg	318 kg
Distributed Capacity (Extension Deck)	136 kg	136 kg
Local Floor Load (With Rated Load)	1,310 kN/m ²	1,500 kN/m ²
Overall Floor Load (With Rated Load)	830 kg/m ²	890 kg/m ²
Maximum # of persons up to 12.5 m/s wind rating	4	4
Diesel Engine	24.8 HP Kubota	24.8 HP Kubota
Fuel Tank	87 L	87 L
Hydraulic Reservoir	87 L	87 L
Outrigger Leveling (Front to Back/Side to Side)	5° / 8°	5° / 8°
Tyre Type	Foam-Filled	Foam-Filled
Tyre Size	26 x 12	26 x 12

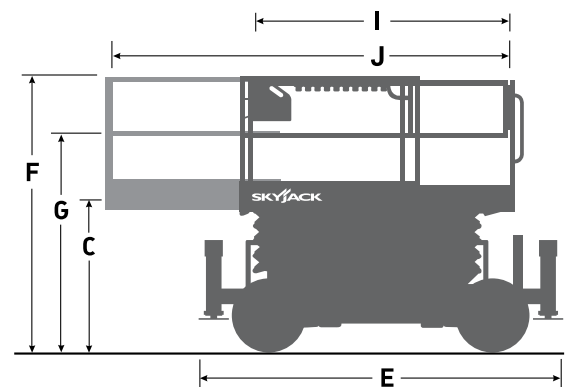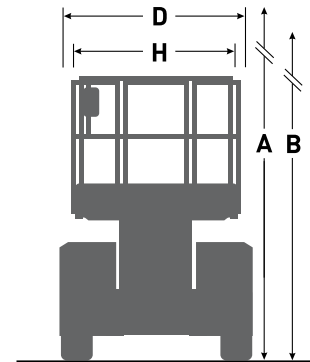

This brochure is for illustrative purpose only and based on the latest information at the time of printing. Skyjack Inc. reserves the right to make changes at any time, without notice, to specifications, standard and optional equipment. Consult the Operating Maintenance and Parts Manuals for proper procedures. AS marked platforms are in conformance to Standard AS/NZS 1418.10:2011.



0800 656 343 www.accesssolutions.co.nz

AUCKLAND
100 Leonard Road
Mt Wellington
Auckland

WELLINGTON
33 Broken Hill Road
Porirua
Wellington

CHRISTCHURCH
28 Nga Mahi Road
Sockburn
Christchurch