

### Performance

Platform Height	20.32 m
Working Height	22.32 m
Horizontal Outreach	17.30 m
Swing	360 Degrees Continuous
Platform Capacity	230 kg
Platform Size	0.91 x 2.44 m
Platform Rotator	180 Degrees Hydraulic
Jib Length	1.83 m
Jib Range of Articulation	130 Degrees (+70, -60)
Weight*	12,900 kg
Drive Speed	6.8 km/h
Gradeability	45%
Turning Radius	
Outside	2.89 m
Inside	1.40 m

### Standard Specifications

#### Power Source

Diesel Engine	
Deutz D2011L04	36.5 kW
Fuel Tank Capacity	151 L

#### Hydraulic Reservoir

- Hydraulic Reservoir 98.4 L
- Auxiliary Power 12V-DC

#### Tyres

- Standard Foam-Filled

### Standard Features

- 4 Wheel Hydrostatic Drive, 4 Wheel Steer
- 180 Degree Hydraulic Platform Rotator
- Platform Console Machine Status Light Panel\*
- AC Generator including AC Outlets to Platform
- 3 Degree Tilt Alarm/Indicator Light
- Swing Out Engine Tray
- 12V-DC Auxiliary Power
- Hourmeter
- Proportional Controls
- Control ADE® System
- Lifting/Tie Down Lugs
- Horn
- Oscillating Axle
- Operator Tool Tray
- Inward Self-Closing Swing Gate
- Flashing Amber Beacon
- Motion Alarm
- Glow Plugs (Diesel Engines)
- Cylinder Bellows

\*Provides indicator lights at platform control console for system distress, low fuel, 3 degree tilt light, and foot switch status.





### Accessories & Options

- 0.91 x 1.83 m Platform
- 1/2 in. Air Line to Platform
- White Noise (Squawker) Alarm
- Fire Extinguisher
- Light Package
- Platform Worklights
- Non-Marking Tyres
- Special Hydraulic Oils (Consult Factory)
- Spark Arresting Muffler
- Accessory Packages
  - SkyGlazier® Package
  - SkyGuard®
  - PipeRack
  - ClearSky®

Note: Some options may increase lead time, and some option combinations may not be available.

### Dimensions

All dimensions are approximate.

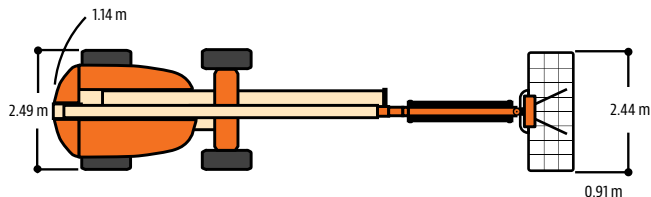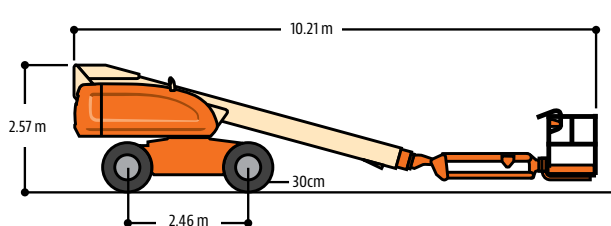

### Reach Diagrams

