
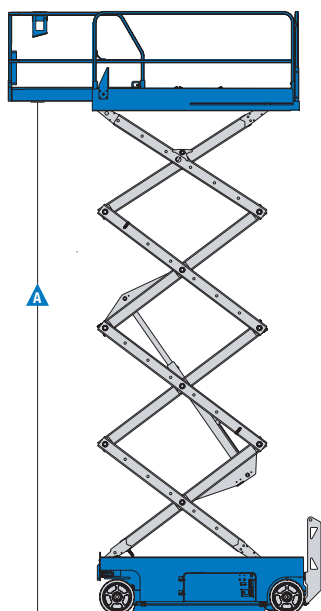
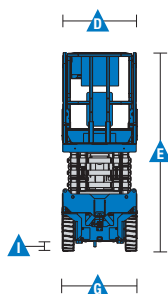


8M GS2032

SCISSOR LIFT

Specifications

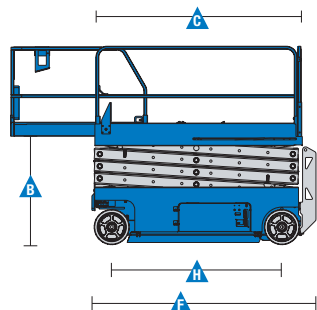

| Models | GS-2032 | | GS-2632 | | GS-3232 | |
|------------------------------------|-------------|--------|-------------|--------|-------------|---------|
| Measurements | US | Metric | US | Metric | US | Metric |
| Working height maximum* | 26 ft | 8.10 m | 32 ft | 9.92 m | 38 ft | 11.75 m |
| A Platform height maximum | 20 ft | 6.10 m | 26 ft | 7.92 m | 32 ft | 9.75 m |
| B Platform height stowed | 3 ft 5 in | 1.03 m | 3 ft 10 in | 1.16 m | 4 ft 3 in | 1.29 m |
| C Platform length - outside | 7 ft 5 in | 2.26 m | 7 ft 5 in | 2.26 m | 7 ft 5 in | 2.26 m |
| extended | 10 ft 5 in | 3.18 m | 10 ft 5 in | 3.18 m | 10 ft 5 in | 3.18 m |
| Slide-out platform extension deck | 3 ft | 0.91 m | 3 ft | 0.91 m | 3 ft | 0.91 m |
| D Platform width - outside | 2 ft 8 in | 0.81 m | 2 ft 8 in | 0.81 m | 2 ft 8 in | 0.81 m |
| Guardrail height: fixed rails | 3 ft 3 in | 0.99 m | | | | |
| folding rails | 3 ft 7 in | 1.10 m | 3 ft 7 in | 1.10 m | 3 ft 7 in | 1.10 m |
| Toeboard height | 6 in | 0.15 m | 6 in | 0.15 m | 6 in | 0.15 m |
| E Height - stowed | | | | | | |
| fixed rails | 6 ft 8 in | 2.03 m | | | | |
| folding rails | 7 ft | 2.13 m | 7 ft 5 in | 2.5 m | 7 ft 10 in | 2.38 m |
| rails folded | 5 ft 9 in | 1.75 m | 6 ft 3 in | 1.91 m | 6 ft 8 in | 2.03 m |
| F Length - stowed | 8 ft | 2.44 m | 8 ft | 2.44 m | 8 ft | 2.43 m |
| Length - extended | 10 ft 11 in | 3.33 m | 10 ft 11 in | 3.33 m | 10 ft 11 in | 3.33 m |
| G Width | 2 ft 8 in | 0.81 m | 2 ft 8 in | 0.81 m | 2 ft 8 in | 0.81 m |
| H Wheelbase | 6 ft 1 in | 1.85 m | 6 ft 1 in | 1.85 m | 6 ft 1 in | 1.85 m |
| I Ground clearance - center | 3.5 in | 8.9 cm | 3.5 in | 8.9 cm | 3.5 in | 8.9 cm |
| - with pothole guards deployed | 0.88 in | 2.2 cm | 0.88 in | 2.2 cm | 0.88 in | 2.2 cm |

Productivity

| | | | | | | |
|------------------------------|------------------|------------|------------------|------------|------------------|------------|
| Maximum platform occupancy** | 2 | | 2 | | 2 | |
| Lift capacity | 800 lbs | 363 kg | 500 lbs | 227 kg | 500 lbs | 227 kg |
| Extension deck capacity | 250 lbs | 113 kg | 250 lbs | 113 kg | 250 lbs | 113 kg |
| Drive height | full height | | full height | | 22 ft | 6.71 m |
| Drive speed - stowed | 2.2 mph | 3.5 km/h | 2.2 mph | 3.5 km/h | 2.2 mph | 3.5 km/h |
| Drive speed - raised | 0.5 mph | 0.8 km/h | 0.5 mph | 0.8 km/h | 0.5 mph | 0.8 km/h |
| Gradeability - stowed*** | 30% | | 25% | | 25% | |
| Maximum outrigger leveling: | | | | | | |
| front to back | | | | | 3° | |
| Maximum outrigger leveling: | | | | | | |
| side to side | | | | | 5° | |
| Turning radius - inside | zero | | zero | | zero | |
| Turning radius - outside | 7 ft | 2.13 m | 7 ft | 2.13 m | 7 ft | 2.13 m |
| Raise / lower speed | 28 / 24 sec | | 28 / 24 sec | | 55 / 28 sec | |
| Controls | proportional | | proportional | | proportional | |
| Drive | dual front wheel | | dual front wheel | | dual front wheel | |
| Multiple disc brakes | dual rear wheel | | dual rear wheel | | dual rear wheel | |
| Tires - solid non-marking | 15 x 5 in | 38 x 13 cm | 15 x 5 in | 38 x 13 cm | 15 x 5 in | 38 x 13 cm |

Power

| | | | | | | |
|---------------------------|---------------------------------------|------|---------------------------------------|------|---------------------------------------|------|
| Power source | 24 V DC (four 6V 225 Ah batteries) | | 24 V DC (four 6V 225 Ah batteries) | | 24 V DC (four 6V 225 Ah batteries) | |
| Hydraulic system capacity | 4.5 gal | 17 L | 4.5 gal | 17 L | 4.5 gal | 17 L |

Weight****

| | | | | | | |
|-----------|-----------|----------|-----------|----------|-----------|----------|
| ANSI, CSA | 3,574 lbs | 1,621 kg | 4,413 lbs | 2,002 kg | 5,185 lbs | 2,352 kg |
|-----------|-----------|----------|-----------|----------|-----------|----------|

Standards Compliance

ANSI A92.6, CSA B354.2, CE Compliance, AS 1418.10

* The metric equivalent of working height adds 2 m to platform height. U.S. adds 6 ft to platform height.
 ** Gradeability applies to driving on slopes. See operator's manual for details regarding slope ratings.
 *** Weight will vary depending on options and/or country standards.

Features

Standard Features

Measurements

GS-2032

- 26 ft (8.10 m) working height
- Up to 800 lbs (363 kg) lift capacity

GS-2632

- 32 ft (9.92 m) working height
- Up to 500 lbs (227 kg) lift capacity

GS-3232

- 38 ft (11.75 m) working height
- Up to 500 lbs (227 kg) lift capacity

Productivity

- 89 x 32 in (2.26 x .81 m) steel platform
- 3 ft (.91 m) extension deck
- Fixed rail with chain entry gate (standard GS™-2032)
- Folding rails with half-height swing gate (standard on GS™-2632, GS™-3232)
- Automatic leveling outriggers (GS™-3232 only)
- Dual front wheel drive
- Universal 20 amp smart charger
- Rear recessed charger receptacle
- SmartLink™ - proportional lift and drive
- Platform control with battery charge indicator and diagnostic display
- On-board diagnostic system
- AC power to platform
- Lanyard attachment points
- Manual platform lowering valve
- Emergency stop at both platform and ground controls
- Rear wheel multiple disc brakes
- Front wheel hydraulic dynamic braking
- Manual hydraulic brake release
- Swing-out component trays
- Solid non-marking tires
- Pothole guards
- Tilt level sensor with audible alarm
- Descent alarm
- Electronic horn
- Hour meter
- Motion alarm

Power

- 24 V DC (four 6 V 225 Ah batteries)

Options & Accessories

Productivity Options

- Folding rails with half-height swing gate (GS™-2032)
- Platform swing gate, half-height (GS™-2032)
- Air line to platform
- Dual flashing LED beacons
- Automotive horn*
- Biodegradable hydraulic fluid

Power Options

- Power Inverter (120 V/60 Hz)*
- EE rating
- AGM maintenance-free batteries



* Not available with EE rating