

### Performance

|                           |                        |
|---------------------------|------------------------|
| Platform Height           | 18.47 m                |
| Working Height            | 20.47 m                |
| Horizontal Outreach       | 12.10 m                |
| Up and Over Clearance     | 8.10 m                 |
| Swing                     | 360 Degrees Continuous |
| Platform Capacity         | 230 kg                 |
| Platform Size             | 0.91 x 2.44 m          |
| Platform Rotator          | 180 Degrees Hydraulic  |
| Jib                       | 1.83 m                 |
| Jib Range of Articulation | 130 Degrees (+70, -60) |
| Weight                    | 11,900 kg              |
| Drive Speed               | 6.8 km/h               |
| Gradeability              | 45%                    |
| Turning Radius            |                        |
| Outside                   | 3.56 m                 |
| Inside                    | 1.68 m                 |

### Standard Specifications

#### Power Source

|                    |                |
|--------------------|----------------|
| Diesel Engine      | Deutz D2011L04 |
| Fuel Tank Capacity | 113.6 L        |
| Fuel Consumption   | 2.46 L/hr      |

#### Hydraulic System

|                 |         |
|-----------------|---------|
| Capacity        | 115.8 L |
| Auxiliary Power | 12V-DC  |

#### Tyres

|          |                       |
|----------|-----------------------|
| Standard | 14 x 17.5 Foam-Filled |
|----------|-----------------------|

### Standard Features

- 4WD & 4WS
- 180 Degree Hydraulic Platform Rotator
- Platform Console Machine Status Light Panel\*
- AC Generator including AC Outlets to Platform
- 3 Degree Tilt Alarm/Indicator Light
- Swing Out Engine Tray
- 12V-DC Auxiliary Power
- Hourmeter
- Proportional Controls
- Control ADE® System
- Lifting/Tie Down Lugs
- Horn
- Four-Wheel Hydrostatic Drive
- Oscillating Axle
- Operator Tool Tray
- Inward Self-Closing, Self-Locking Swing Gate
- Flashing Amber Beacon
- Motion Alarm
- Glow Plugs (Diesel Engines)

\* Provides indicator lights at platform control console for system distress, low fuel, 3 degree tilt light and foot switch status.





### Accessories & Options

- 0.91 x 1.83 m Platform
- 1/2 in. Air Line to Platform
- Light Package
- Platform Worklights
- Mesh to Mid-Rail
- Special Hydraulic Oils (Consult Factory)
- Spark Arresting Muffler
- Accessory Packages
  - SkyWelder® Package
  - SkyGlazier® Package
  - Nite Bright® Package
  - SkyGuard®
  - Pipe Rack
  - Cable Ladder Carrier
  - ClearSky®

Note: Some options may increase lead time, and some option combinations may not be available.

### Dimensions

All dimensions are approximate.

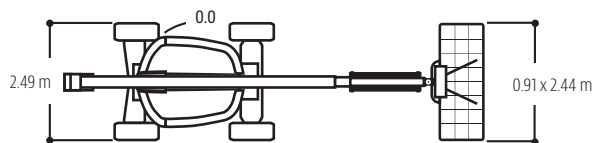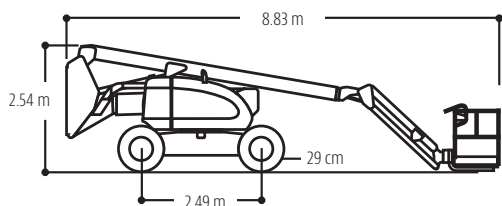

### Reach Diagram

