

Specifications

Models	Z-40/23N DC		Z-40/23N RJ DC	
Measurements	US	Metric	US	Metric
Working height maximum*	46 ft 5 in	14.32 m	46 ft 5 in	14.32 m
Platform height maximum	40 ft 5 in	12.32 m	40 ft 5 in	12.32 m
Horizontal reach maximum	22 ft 8 in	6.91 m	22 ft 8 in	6.91 m
Up and over clearance maximum	21 ft 3 in	6.48 m	21 ft 3 in	6.48 m
A Platform length	2 ft 6 in	0.76 m	2 ft 6 in	0.76 m
B Platform width	4 ft 8 in	1.42m	3 ft 10 in	1.17 m
C Height - stowed	6 ft 6 in	1.98 m	6 ft 6 in	1.98 m
D Length - stowed	21 ft 5 in	6.53 m	21 ft 5 in	6.53 m
E Width	4 ft 11 in	1.50 m	4 ft 11 in	1.50 m
F Wheelbase	6 ft 5 in	1.96 m	6 ft 5 in	1.96 m
G Ground clearance - center	9.5 in	24.1 cm	9.5 in	24.1 cm

Productivity

Lift capacity	500 lbs	227 kg	500 lbs	227 kg
Platform rotation	180°		180°	
Vertical jib rotation	128°		128°	
Horizontal jib rotation	—		180°	
Turntable rotation	355° non-continuous		355° non-continuous	
Turntable tailswing	5 in	0.13 m	5 in	0.13 m
Drive speed - stowed	4.5 mph	7.2 km/h	4.5 mph	7.2 km/h
Drive speed - raised**	0.68 mph	1.1 km/h	0.68 mph	1.1 km/h
Gradeability - stowed***	30%		30%	
Turning radius - inside	2 ft 11 in	.87 m	2 ft 11 in	0.87 m
Turning radius - outside	10 ft 6 in	3.20 m	10 ft 6 in	3.20 m
Controls	24 V DC proportional		24 V DC proportional	
Tires - front	22x7x17.75 in	0.56x0.18x0.45 m	22x7x17.75 in	0.56x0.18x0.45 m
Tires - rear	25.6 x 7 in	0.64 x 0.18 m	25.6 x 7 in	0.64 x .018m


Power

Power source	48 V DC (eight 6 V batteries)		48 V DC (eight 6 V batteries)	
	350 Ah capacity		350 Ah capacity	
Drive system	AC Drive, 48V 3 phase		AC Drive, 48V 3 phase	
Auxiliary power unit	24 V DC		24 V DC	
Hydraulic tank capacity	8 gal	30.3 L	8 gal	30.3 L


Weight****

	15,230 lbs	6,908 kg	15,300 lbs	6,940 kg
--	------------	----------	------------	----------


Range Of Motion Z-40/23N

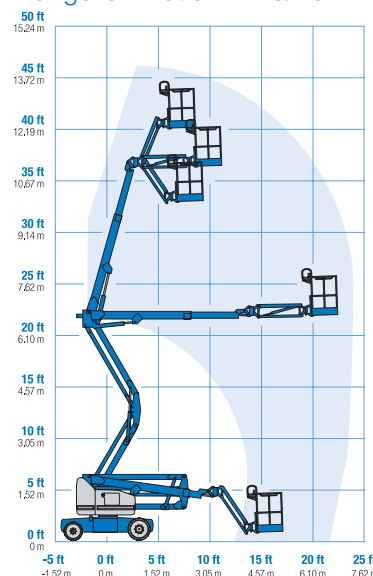

Range Of Motion Z-40/23N RJ

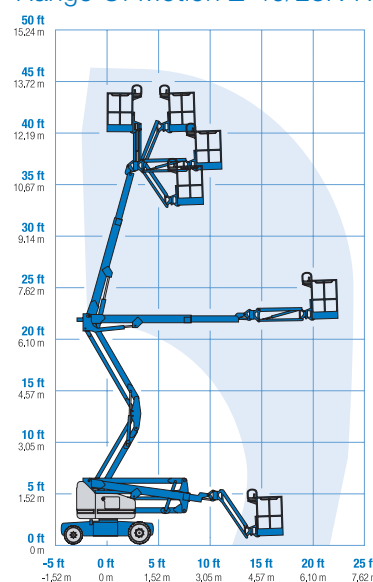


Jib Range Of Motion Z-40/23N RJ

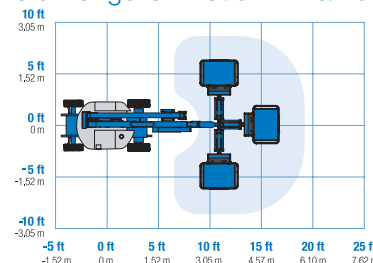

Standards Compliance

ANSI A92.5, CSA B354.4, EN 280, AS 1418.10

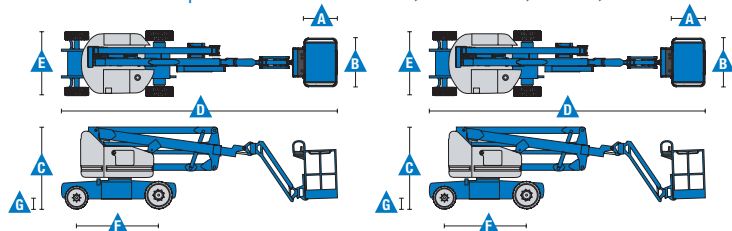

* The metric equivalent of working height adds 2 m to platform height. U.S. adds 6 ft to platform height.

** In lift mode *(platform raised), the machine is designed to operate on firm, level surfaces only.

*** Gradeability applies to driving on slopes. See operator's manual for details regarding slope ratings.

**** Weight will vary depending on options and/or country standards.

Features

Standard Features	Easily Configured To Meet Your Needs	Options & Accessories
<p>Measurements</p> <p>Z-40/23N & Z-40/23N RJ</p> <ul style="list-style-type: none"> • 46 ft 5 in (14.32 m) working height • 22 ft 8 in (6.91 m) horizontal reach • 21 ft 3 in (6.48 m) up and over clearance • Up to 500 lbs (227 kg) lift capacity <p>Productivity</p> <ul style="list-style-type: none"> • 4 ft 11 in (1.50 m) width • 2 ft 11 in (.87 m) inside turning radius • 4 ft (1.22 m) jib boom with 128° working range • AC electric drive system • Self-leveling platform • Hydraulic platform rotation • Proportional joystick controls • Thumb rocker steer • Drive enable • AC power cord to platform • Horn • Hour meter • Tilt alarm • Descent, motion, & travel alarms • Hydraulic filter condition monitor • 355° non-continuous turntable rotation • Traction control • On board easy to understand diagnostics • Telematics ready connector • Lift Guard™ Contact Alarm • Dual parallelogram for vertical wall tracking <p>Power</p> <ul style="list-style-type: none"> • 48 V DC deep cycle battery pack • 24 V DC auxiliary power • Universal 30A battery smart charger • Battery charge indicator • Low battery voltage interrupt 	<p>Platform Options</p> <ul style="list-style-type: none"> • Steel 4 ft 8 in (1.42 m) with sliding mid-rail (Z40N only) • Steel 3 ft 10 in (1.17 m) with sliding mid-rail <p>Jib Options</p> <ul style="list-style-type: none"> • 4 ft (1.22 m) jib boom • 4 ft (1.22 m) horizontal rotating jib boom <p>Power</p> <ul style="list-style-type: none"> • 48 V DC (eight 6 V 350 Ah batteries) <p>Drive</p> <ul style="list-style-type: none"> • 2WD Electric AC <p>Tire</p> <ul style="list-style-type: none"> • Solid rubber non-marking 	<p>Productivity</p> <ul style="list-style-type: none"> • Platform swing gate • Half-mesh platform inserts with swing gate • Air line to platform • Specialty hydraulic oil (Cold weather, fire resistant or biodegradable) • Hostile environment kit • Flashing beacon • Light package • Lockable platform control box cover • Florescent tube caddy** • Pipe cradle (pair)** <p>Power</p> <ul style="list-style-type: none"> • AGM batteries • 800 watt 120VAC power inverter



* Reduces platform weight capacity to 440 lbs
** Available through aftermarket parts only